BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

							Estimate Cost Rs.	4000000.00

Name of Work: Estimate for Drilling of Borewells and Providing Pipelines of Drinking Water Line of Yelahanka New Town Ward No. 04.

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	Geophysical investigation of site for sinking Borewell for supplying drinking water to the habitation either through the Hand pump, MWS of P.W.S.S by vertical electrical sounding by adopting Venner or Schlumberger's method, including reconnaissance survey of geological formation, Gerophysical investigation of existing Ground Wate in the vicinity, its qualityf 1.0 meter in consolidated formation for proper seating of casing pipe, depth of drilling required to cover full depth of aquifer proposed to be tapped, probable yield and other information required including transportation of instrument and accessories to work site., engaging techinical personal and labour required etc., as per Specification and direction **(P.48, I. 9.4) PRED.SR 2012-13**	Each BW							
			3				3	1938.46	**5815.00**
2	Sinking borewell of 165 mm dia clear using super fast hydraulic rig of capacity 250 PSIG & above CFM & above in all strats including over burden upto 20 mts fixing of casing pipes, collars and cap with necessary cutting, throading and welding including transportation of rig and supporing vehicles, crew charges and cost of consumables etc., complete including yield testing at the final depth with a minimum working of compressor for one hour (excluding coat of casing pipes, collars, cap etc.,) **P. 46 / I. 9.1 PRED SR 2012-13**	Rmtr							
	0 to 50 m		3	50.00			150.00	315.18	47277.00
	50 to 100 m		3	50.00			**150.00**	412.00	**61800.00**
	100 to 150 m		3	50.00			**150.00**	458.35	**68753.00**
	150 to 200 m		3	50.00			**150.00**	484.10	**72615.00**
	200 to 250 m		3	50.00			**150.00**	560.32	**84048.00**
	250 to 300 m		3	50.00			**150.00**	600.49	**90074.00**
	300 to 350 m		3	50.00			150.00	640.67	96101.00

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
3	Supply of ISI mark 175 mm nominal bore, Plain end steel casing pipe - grade of Steel Fee 410 of wall thickness 5.4mm thick confirming to IS 4270:2001 and latest amendments, electric resistance welded steel tube material and confirming to IS 1387/1993 and manufactured by baseic open hearth electric or basic oxygen process in random length of 5 to 7 mts both ends threaded confirming tio IS 554/1985, one end fixed with socket confirming to IS 4270:2001 and the other end with screwed pipes ISI Marking weighing 25.10Kg/mtr (Inclusive of all taxes and durties) Prices include Collar-medium duty **P. iii, I No. 84 PRED SR 2012-13**	Rmtr							
			3	75.00			**225.00**	1325.00	**298125.00**
4	Providing 250mm dia PVC Pipe 6kg/cm **BWSSB SR 2014-15 Page No. 53, Item No. 1(iii)**	Rmtr							
			3	18.00			**54.00**	1100.00	**59400.00**
5	Providing and fixing 160mm Borewell Cap **P. iii, I No. 85 PRED SR 2012-13**	Each							
			3				**3**	100.00	**300.00**
6	Supply and delivery at site brand New texmo/ innoval/ Lubi/ Sabar / Atalanta/ Calamal/ make suitable for vertical installation in 150mm dia bore well comprising of single stage or multistage CF pump close coupled by measns of stainless steel coupling to suitable HP suitable speed totally enclosed and filled with pure drinking water (Wet type) squirrel cage submersible induction motor suitable for opertation of 3PH., 50 Hz, 380/440 volts AC supply fitted with required aqccessories such as suction, casing suction strainers sand guard Non return value etc. complete . The pump and motor shall form an integral unit with all the required fittings 12.50 HP 25 stage. ATALANTA< SUGNA< CRI, KIRLOSKAR and other Equivalent Pumps **PWD SR 2015-16 P. XXXX Item No. 24 including of all taxes**	No							
	12.5 HP 25 Stage		3				**3**	60400.00	**181200.00**
7	KSRB13-3.6 : Providing and fixing in trenches galvanised / mild steel tubes (medium grade) 50mm dia nominal bore with all fittings (earth work in trenches to be measured and paid for separately) including cost of all materials, labour charges, HOM of equipments and testing complete as per specifications. Specification No.KBS 13.2.14 / 13.6 **Page No. 89, Item No. 13.15 PWD SR 2016-17**	m							
			3	280.00			**840.00**	457.92	**384653.00**
	Basic Rate	432.00							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Area Weightage @ 6%	25.92							
	Total	**457.92**							
8	Supplying and drawing 3 core flat PVC sheathed submersible pump cable manufactured with electrolytic grade copper with flexible copper with low resistance conductor confirming to table 3 class 5 of IS:8130-1984 and virgin grade PVC insulation and powder coating extruded PVC sheathed suitable for working voltage upto 1100Volts as per IS-694:1990 & confirming to GTP of **GROUP-A. P. No. 12 / I No. 2.10.4(1) 3C x 4 Sqm mm KPWD Electrical SR 2014-15**	Mtr							
			3x2	290.00			**2320.00**	126.70	**293944.00**
9	Labour charges for erection as new /repaired submercible pumpset allong with GI pipe (32/50mm) cable (new submercible pumpset if required will be supplied by the department free of cost and released pumpset shoud be handed over to department including transportation (Each lenth =6.00) **Page No. 558, Items No-3 BWSSB SR for 2014-15)**	Per Length							
			3	49.00			**147**	88.00	**12936.00**
10	Supplying and fixing 20"x20"x2.5" polished wood board made of not less than 15mm thick plank on both sides with planks made out of not more than 2 pieces and fixing the same to the wall using tapered inverted wooden plugs screws etc., **P No. 44 / I No. 6.6.6 KPWD Electrical SR 2014-15**	Each							
			3				**3**	302.00	**906.00**
11	Supplying of 1.1 KV LT UG cable having aluminum conductor PVC insulated, extruded inner sheathed, galvanized, steel strip (except 2CX10Sq.mm wire armoured) confirming to IS-3975:1990 (No. of Strip indicated in GTP) & extruded PVC outer sheathed armoured cable with specified IS-1554 Part-1:1988 & confirming to GTP of GROUP-A **P No. 55/ I No. 7.4.4 4 core 16 Sqmm KPWD Electrical SR 2014-15**	Mtr							
			3	40.00			**120.00**	140.40	**16848.00**
12	Labour charges for laying of 1.1 KV class UG cable in existing trench GI pipe / stoneware pipe / on wall / on pole as required.In existing trench/duct. **P No. 61 / I No. 7.8.1 6Sqmm to 16 Sqmm) KPWD Electrical SR 2014-15**	Mtr							
			3	40.00			**120.00**	10.80	**1296.00**

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
13	Digging of trench of 0.6m deep x 0.50 mtr wide refilling the trench to the required ground level and consolidating etc., complete.(As per Civil SR KSRB I-2, P-7) **P No. 61 / I. No. 7.9.3 KPWD Electrical SR 2014-15**	Mtr							
	For Cutting Road Surface		3	35.00			105.00	85.00	8925.00
14	Supplying and fixing of class A (medium duty) GI pipe of wall thickness not less than 3.25mm on pole/wall/drain crossing with necessary clamping arrangements for UG cable of 1.1 KV **P. No. 62 / I No. 7.12.1 KPWD Electrical SR 2014-15**	Mtr							
	40mm dia GI pipe		3	4.00			12.00	345.00	4140.00
15	Supplying and fixing L.T. cast Iron pot heads suitable for 1.1 KV class UG cable filled with necessary bitumen/insulating compound complete with terminals, clamps, bolts, nuts and washers etc., **P. No. 62 / I.No. 7.13.2 KPWD Electrical SR 2014-15**	No.							
	16Sqmm		3				3.00	280.00	840.00
16	Supplying, fixing, wiring, earth electrode for grounding conduits, I.C. cutouts and other equipment's on the meter board using 40mm dia 2.90mm thick GI pipe 2.5 mtr long buried in a pit ... The pit should be filled with equal proportion of salt and charcoal 150mm all-round the pipe to complete depth. The connection from the pipe to the conduit etc., is to be established through GI wire of size as per ISI specification 7.3.3. of IS 732 using 12mm dia bolts, nuts, washers and check nuts etc., the pipe shall have 16 through holes of 122 mm dia, **(P No. 55, I No. 7.1) KPWD Electrical SR 2014-15**	No							
			3				3	2727.00	8181.00
17	Supplying & fixing of Porcelain fuse channel with cut out on existing wooden/panel using necessary nuts, bolts and washers.**P No. 44 / I No. 6.7.2 KPWD Electrical SR 2014-15**	No.							
	32 Amps		3x6				18	180.00	3240.00
18	KSRB13-7.1-4 : Providing and fixing in position 50mm nominal bore gun metal non-return valve horizontal type of approved make including cost of all materials, labour and HOM of equipments with all leads complete as per specifications. Specification No.KBS 13.2.10 / 13.13 **Page No. 93, Item No. 13.55, PWD SR 2016-17**	Nos							
			3				3	1585.76	4757.00
	Basic Rate	1496.00							
	Area Weightage @ 6%	89.76							
	Total	**1585.76**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
19	Providing NP/CP waste unions conforming to ISI specifications and fixing them in position as per directions including cost of materials, fixtures and conveyance to work spot etc., complete.- **for 50mm dia: Page No. 95 , Item No. 13.81.3 PWD SR 2016-17**	Each							
	50mm dia		3				3	227.90	684.00
	Basic Rate	215.00							
	Area Weightage @ 6%	12.90							
	Total	**227.90**							
20	Supplying and fixing 50mm dia GI X nipple with ISI mark with all lead and lift loading unloading and labour charges etc complete **P. XXXVII PWD SR 2016-17**	No							
			3	4.00			12	104.30	1252.00
21	Supplying and fixing miniature circuit breakers on existing MCB distribution boards using necessary fixing materials and 'C' Type curve, indicator ON/OFF, energy cross-3 with Short circuit breaking capacity of 10K and complete wiring as required confirming to IEC 60898. **5-32Amps Group A TPN P No. 47 / I No.6.16.5 KPWD SR 2014-15**	No							
			3				3	1547.00	4641.00
22	Fabricating supplying and mounting MS box made out ... SWG suitable for floor / wall mounting, fully weather proof with provision for better heat dissipation, provided with hinged front cover, equipped with tamper proof locking arrangements, with suitable size clamps with necessary cable entry pipe with gland and box should be finished with 2 coats of red oxide primer paint and finally finished with approved colour enameled metal paint etc., complete **P.No. 57, I. No. 6.41.2 KPWD Electrical SR 2014-15**	Sq.Cm							
	16SWG		3x2	120.00	60.00		43200.00		
			3	360.00	25.00		27000.00		
							70200.00	0.33	**23166.00**
23	Supplying fully automatic store detta starter unit push button type with suitable wires three contractors one adjustable termal timer mounted on a common base plate held in steel enclosure for use on 400/440 volts 3pase and wired offter fixing to the wooden board for motor upto **12.50 HP (KPWD electrical SR for 2014-15 Page No. 44 Item No. 6.2.1)**	No.							
			3				3	6583.00	19749.00

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
25	Earthwork excavation for pipeline trenches including deporiting or bank up to a lead of 50 mtrs including sharing and strutting danger lighting and using site rails and boming poles at every 100 mtrs wherever necessary as directed in th following strructure manhole. **Page No. 01/ Item No.1.2.2 / PRED SR 2012-13 Hard Soil**	Cum							
			1	1475.00	0.75	1.00	1106.25		
							1106.25	188.00	**207975.00**
	Basic Rate	188.00							
26	Providing and instalation at site of works P.V.C.Pipes including cost of pipes and specials and incluidng lowring into trenches, laying true to line, level and perfect linking at joints, leak proof including jointing encasing the pipe alround to a depth Not less than 15cm with grave or selected earth avalabile from the execavation Etc., **Page No.15 item No.3.4.2 b PRED SR 2012-13.**	Rmtr							
	75 mm dia 6 KSC PVC pipe		1	1475.00			1475.00		
							1475.00	157.00	**231575.00**
	Basic Rate	157.00							
27	KSRRB M1200-46. Sand filling in wells complete as per drawing and technical specifications MORTH Specification No.1207 Page No. 213, **Page No. 26.124, PWD SR 2016-17**	Cum							
			1	1475.00	0.75	0.40	442.50		
							442.50	2922.42	**1293171.00**
	Basic Rate	2757.00							
	Area Weightage @ 6%	165.42							
	Total	**2922.42**							
28	Refilling the basement and pipeline treanches with secleted available earthe for trench excavation including authority condition in layers from thedi including disponsary of the sunplus earth with a heavy 200 mtrs **Page No. 3 / Item No. 1.6 / PRED SR 2012-13**	Cum							
			Qty. Vide Item No. 25-27				**663.75**	61.00	**40489.00**
	Basic Rate	61.00							
29	KSRB13-6.3-7 : Providing and fixing in position brass gate valve with C.I wheel of approved quality (screwed end) **65mm nominal bore** including cost of all materials, labour and HOM of equipments with all leads complete as per specifications. Specification No.KBS 13.2.6 / 13.3. **P. No.92 / I. No. 13.38 PWD SR 2016-17**	Each							
			17				**17**	2729.50	**46402.00**
	Basic Rate	2575.00							
	Area Weightage @ 6%	154.50							
	Total	**2729.50**							
	Sub Total								**3675276.00**
	KRIDL Charges @ 8%								**294022.00**
	BESCOM Deposit for Borewell	L/S	3	10000.00					**30000.00**

30	Miscellaneous and Unforeseen Charges	L/S							1011.74
								Total RS	4000000.00

(Rupees forty lakhs only)

CERTIFICATE

1. The work spot has been inspected and the work is found necessary.
2. This estimate is prepared as per C.S.R. of, PRED 2016-17 & SE-RDED approved Rate.
3. The provisions were made in this estimate are necessary and adequate.
4. This works come under B.B.M.P. limits.

Assistant Engineer
Ward no: 04

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Yelahanka Sattellite Sub Division
Bangalore.

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Yelahanka Division
Bangalore - 64

ADMINISTRATIVELY SANCTIONED FOR Rs. 40.00 lakhs
forty lakhs only
P. 1802

Technical Sanction
Accorded for 40.00 lakh Rs
Head of A/C P1802
CER NO : 148 Dt:. 24.7.17

TA CE (YNK).

Dt. Y.C(4) PRL/AS/30/17-18
24.7.2017 40.00 lakhs

Bangalore-92

150 - YELAHANKA AC

BRUHAT BANGALORE MAHANAGAR PALIKE
WARD: 4 - YELHANKA SATELLITE TOWN

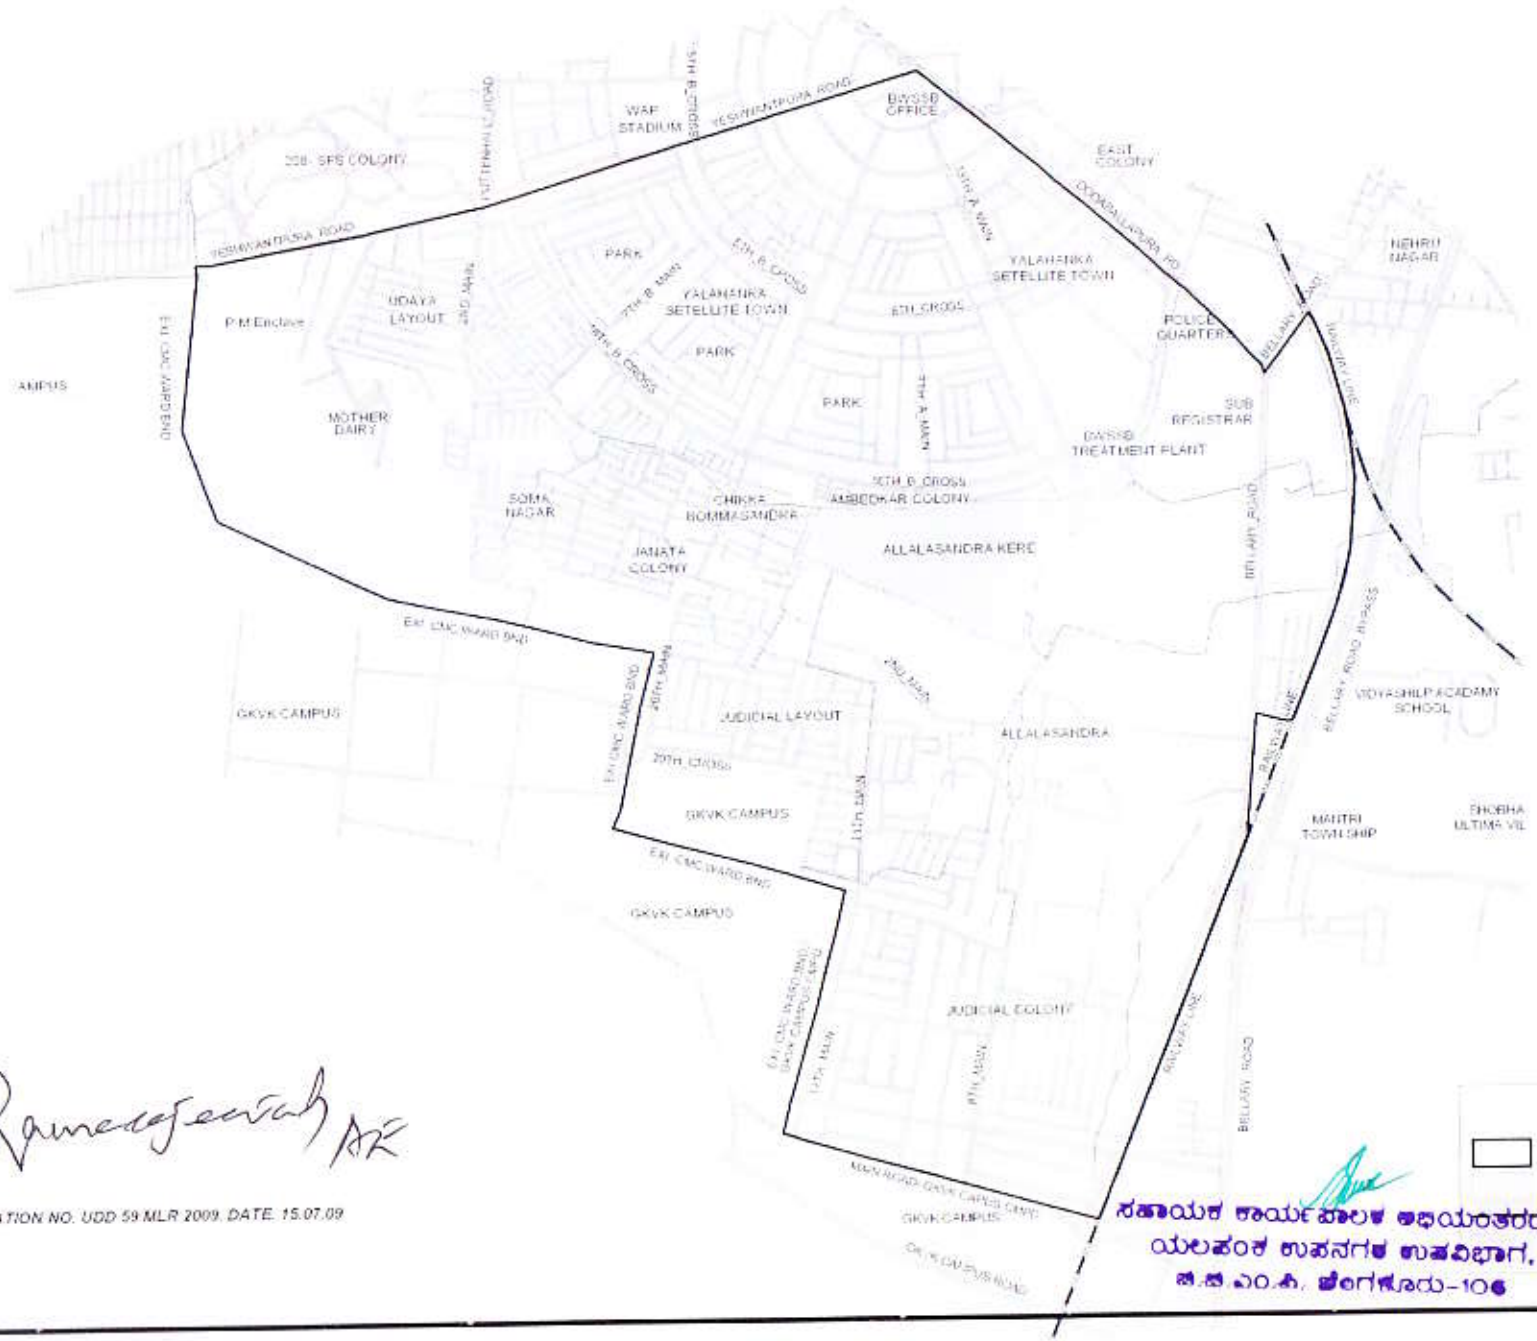

NOTIFICATION NO. UDD 59 MLR 2009, DATE. 15.07.09

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಯಲಹಂಕ ಉಪನಗರ ಉಪವಿಭಾಗ,
ಬಿ.ಬಿ.ಎಂ.ಪಿ, ಬೆಂಗಳೂರು-10